


unex

lighting · made for you

INSTRUCTION MANUAL

Slick Gp

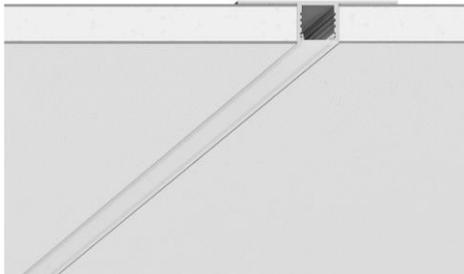


Basic 18 Gp



We recommend using a non-sticker paper joint tape for installation.




1

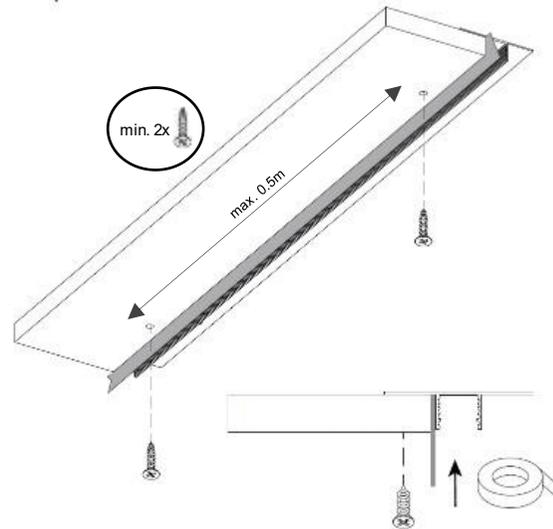


Screw the profile to the ceiling on a plate, leaving a gap or inserting a joint tape.

2

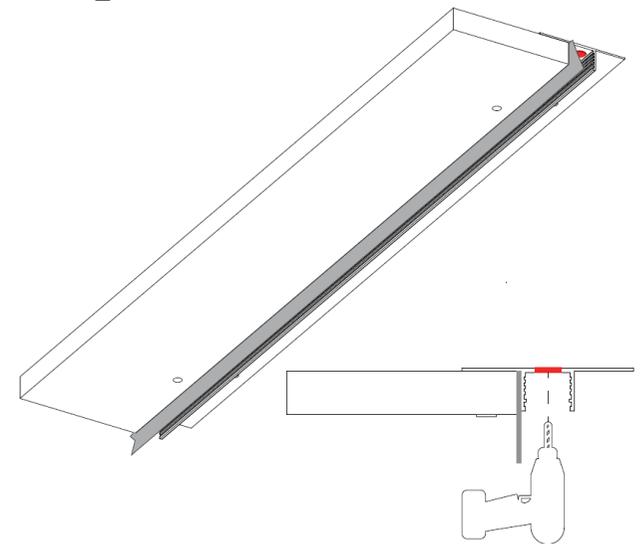


Drill a hole in the profile for cable entry.

3

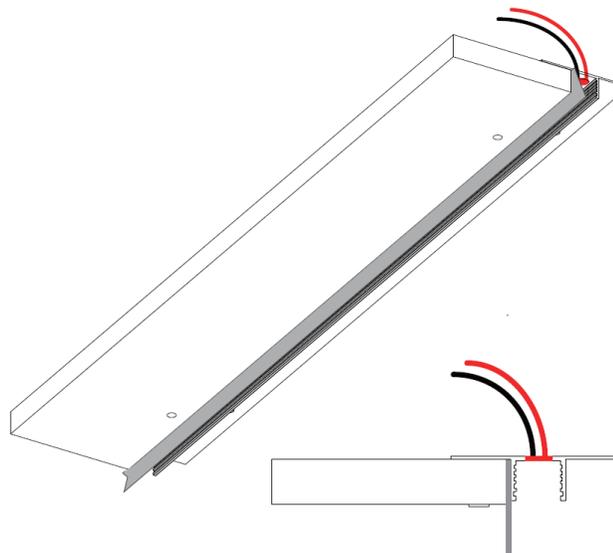


Guide the supply cable through the hole.

4

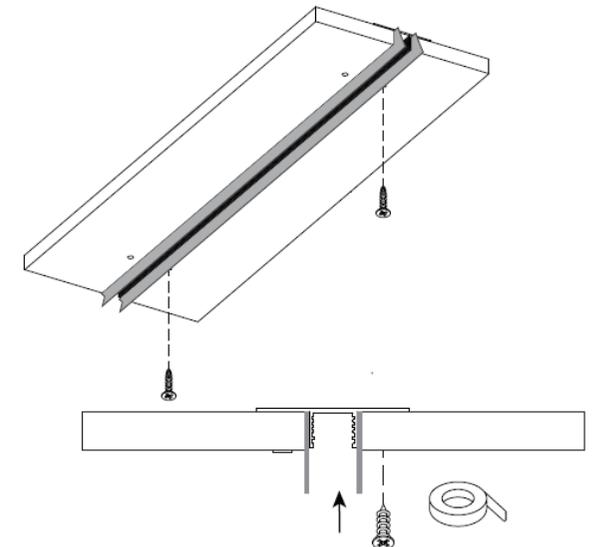


Screw the profile to the ceiling on the second plate, leaving a gap or inserting a joint tape.

5

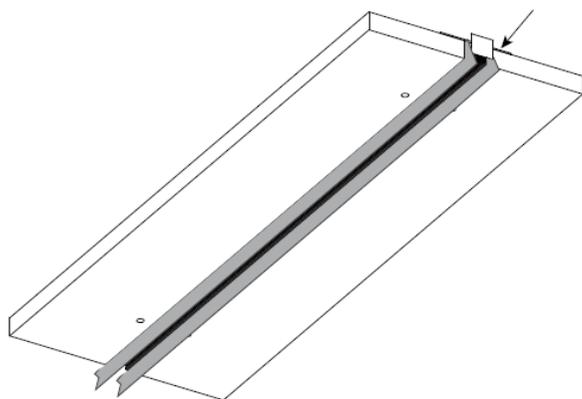


Attach the endcap, if necessary,
not suitable for wall-to-wall installation.

6

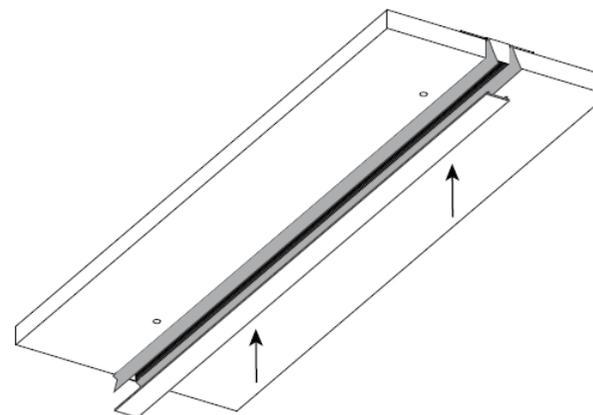


Insert the protective diffuser.

7

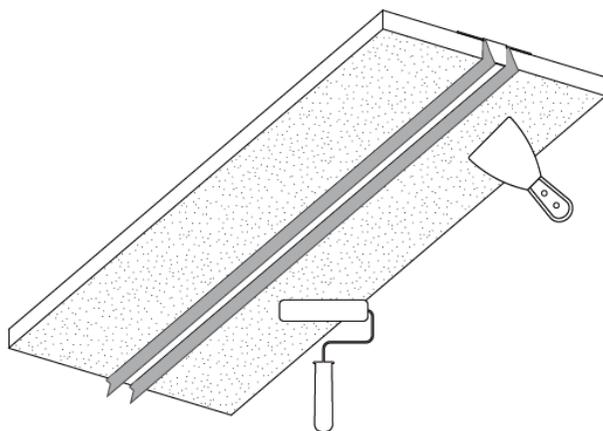


Plaster the board and create a linear cut on both
sides of the profile.
Paint and let dry.

8

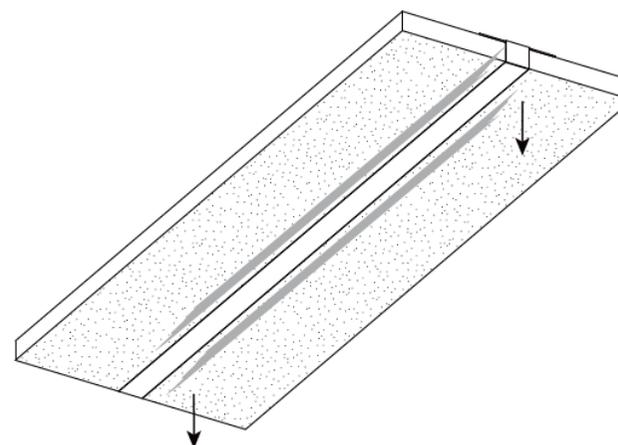


Remove the joint tapes and the protective diffuser.

9

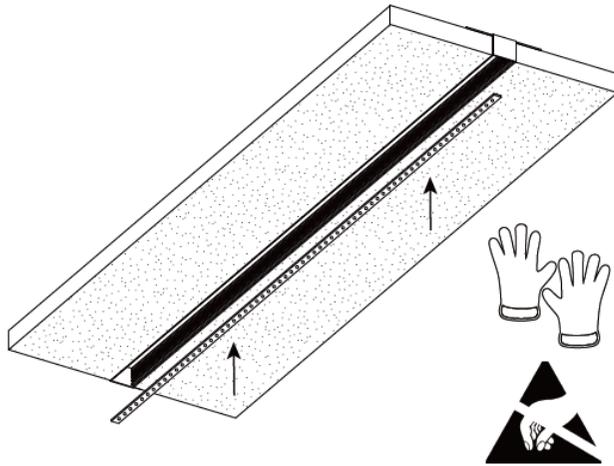


Carefully stick the LED strip into the profile
(ESD glove protection).

10

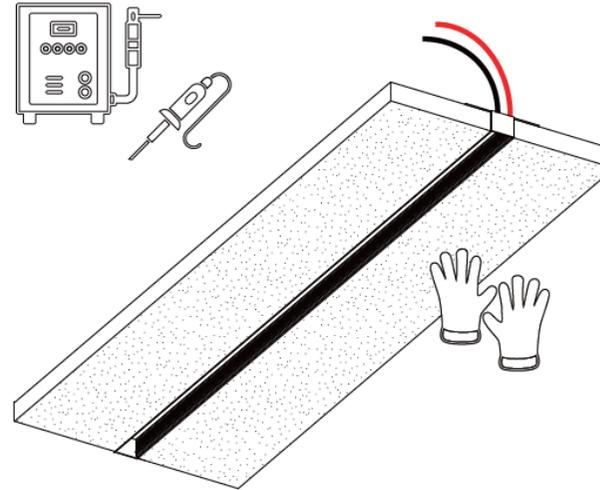


Solder the wires to the LED strips.

11

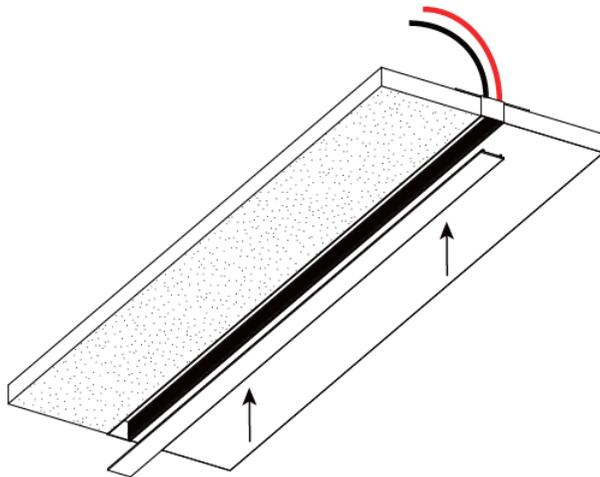

Place the diffuser on the profile.
High or flat depending on the desired light effect.

12

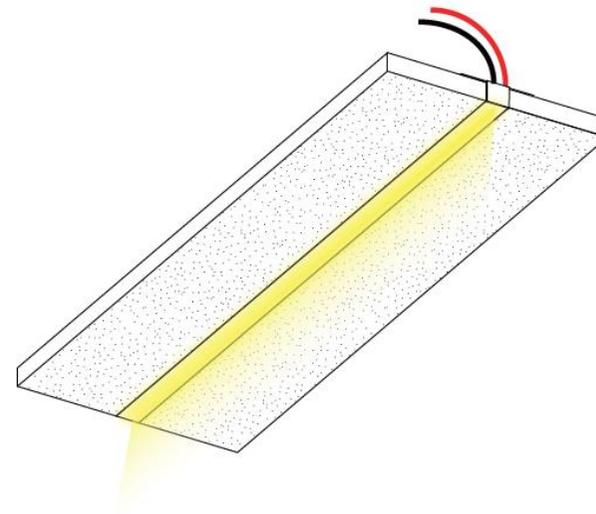

Turn on the light.